

## Product Sheet

### Legend Series – Down Light (投嵌燈)

---

## 50W LED Downlight(投嵌燈)



Specification 【規格表】	
Input Voltage (輸入電壓) :	100~240 VAC (50 /60Hz)
Watts (使用功率) :	50W
Power Factor (功率因素) :	>0.9
Color Temp. :	3000K / 4000K
Lumen (光通量) :	4200lm
Angle :	25° / 40° / 120°
LED type:	CREE MK-R *6pcs
Dimension (尺寸) :	W162*H155mm
Cut-Outs (嵌入孔) :	∅ 150mm
Weight (重量) :	900g (Without Adaptor)

## Applications



Commercial lighting, Spot light, Indoor lighting, Recessed 6" lighting...etc.

商場照明、重點區域照明、室內一般照明及當 15 公分嵌燈使用...

---

## Ordering Code Guideline (編碼原則)

EX: DL50 – WW – W150 – 25

Down light 50W

3000K/4000K

Recessed 150mm


Beam Angle

## Model List (型號)

Item	Model No. (品號)	Spec. (規格)
1-1	DL50-WW-W150-25	Down Light, 3000K, Cut-Outs (嵌入孔) 150mm, 25° (投射角)
1-2	DL50-NW-W150-25	Down Light, 4000K, Cut-Outs (嵌入孔) 150mm, 25° (投射角)
2-1	DL50-WW-W150-40	Down Light, 3000K, Cut-Outs (嵌入孔) 150mm, 40° (投射角)
2-2	DL50-NW-W150-40	Down Light, 4000K, Cut-Outs (嵌入孔) 150mm, 40° (投射角)
3-1	DL50-WW-W150-120	Down Light, 3000K, Cut-Outs (嵌入孔) 150mm, 120° (投射角)
3-2	DL50-NW-W150-120	Down Light, 4000K, Cut-Outs (嵌入孔) 150mm, 120° (投射角)

## Mechanical Drawing (產品尺寸圖)

【Rotatable (可旋轉) 355°】


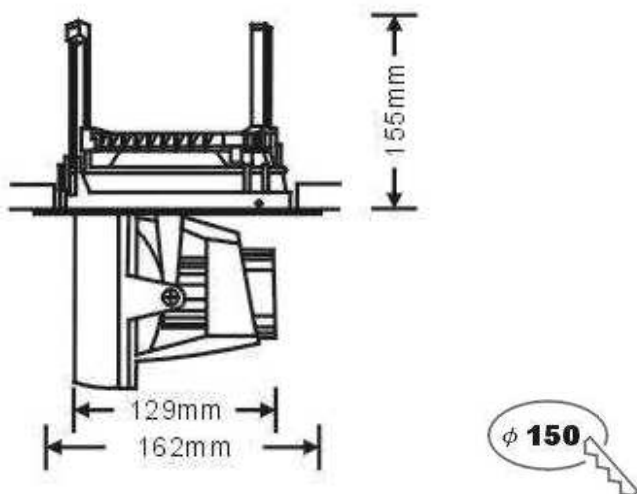


## Environmental Condition (環境條件)

Item (項目)	Specification Description (規格說明)
Operating Temp (操作環境溫度)	0 ~ +50°C
Storage Temp (保存環境溫度)	-20 ~ +60°C
Humidity (環境相對濕度)	5% ~ 85%

## Light Distribution Curve(配光曲线)

◆ Beam Angle : 25°

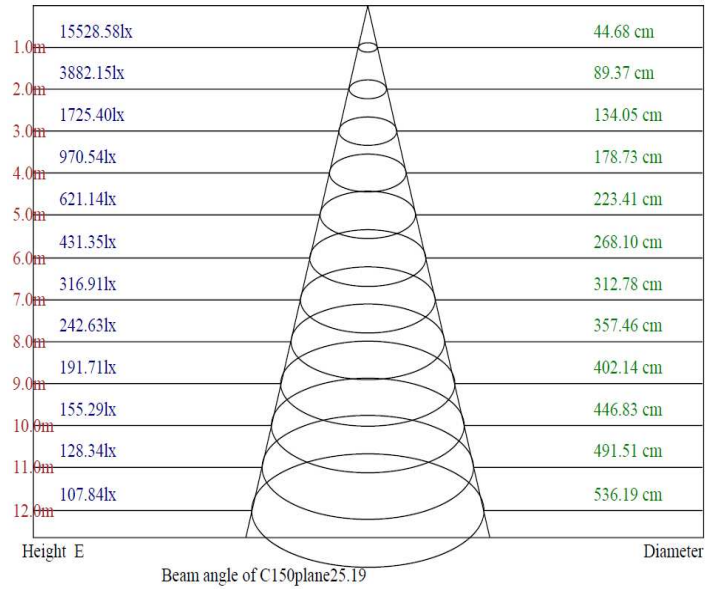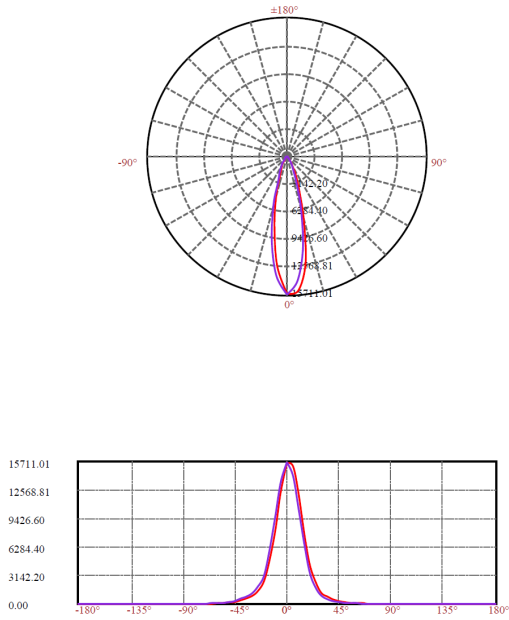

◆ Beam Angle : 40°

